



**BEVERAGE-AIR**

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

**BF602AP BLAST CHILLER/SHOCK ROLL-THRU FREEZER**

## REMOTE BLAST CHILLER

BF602AP Solid Door Roll-Thru Blast Chiller

**MODEL:  
BF602AP-2P**



Note: Shown With Optional Ramps

**3 Year Parts/Labor Warranty  
5 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Die-formed interior floor has rounded corners
- Central drain for easy cleaning
- Anti-condensation perimeter heating around door openings
- Ergonomic door handles and stainless steel
- Snap in place magnetic gaskets self closing doors with hold open stop at 100°
- Soft and hard, timed or core probe blast chilling
- Soft and hard, timed or core probe shock freezing
- Automatic recognition of core probe
- Multi point sensor temperature display button
- Core probe heater button
- HACCP alarm display button
- Pre-cooling cycle button
- Adjustable evaporator fan speed button
- Timed manual defrost button
- USB data recorder
- Infinity mode program with adjustable set point
- Automatic conservation mode at end of cycle
- On board recipe book with 68 pre-set programs
- 99 Free memory positions for custom programs
- LCD illuminated temperature display
- Real time clock
- One, high precision heated multi sensor probe
- Maximum interior dimensions for carts: 30"W x 122"D x 75"H (not included)
- Ramp dimensions: 39.2"W x 31.9"D (ramps not included)

### OPTIONS & ACCESSORIES

- Single sensor probes (up to 4 possible)
- Change door swing
- Ramps (not included)

### REFRIGERATION SYSTEM

- Remote refrigeration system uses R404 refrigerant (condensing unit to be provided by others)
- Evaporator fitted with a high flow rate fan insures maximum cooling efficiency
- Indirect air flow assures highest product quality
- Manual defrosting with door open on a timed cycle
- Blast chilling (194°F to 37°F in 90 minutes) or shock freezing (194°F to 0°F in 240 minutes) cycles



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com



# BEVERAGE-AIR®


## Remote Blast Chiller/Shock Roll-Thru Freezer Model: BF602AP-2P

MODEL	BF602AP-2P
<b>EXTERNAL DIMENSIONAL DATA</b>	
Width Overall (in)	59.06"
Depth Overall (in)	138.39"
Height Overall (in)	87.80"
Number of Doors	2
Width, Door Openings (in)	203.15"
Door Openings (in)	31.5" x 75.59"
<b>PERFORMANCE DATA</b>	
Sheet Pan Capacity* (18" x 26")	60
Steam Table Pan Capacity* (12" x 20")	120
Chilling Capacity In 90 Min	1350 lbs
Freezing Capacity In 240 Min	900 lbs
Climate Class	5
Capacity Mobile Cart(s)	3 GN 2/1
<b>ELECTRICAL DATA</b>	
Cabinet Voltage	208-240/60/3
Total Amperes	26.0
NEMA Plug	N.A.
<b>REFRIGERATION DATA</b>	
Condensing Unit Size, HP	N.A.
Refrigerant	R404
Capacity (BTU/Hr) (113°F/-13°F)	123,979
Heat Rejection (W) (14°F/95°F)	N.A.
Refrigerant Amount (lbs)	N.A.
<b>WEIGHT DATA</b>	
Gross Weight - Crated	3104 lbs
Height - Crated	(3) 91"
Width - Crated	(3) 56"
Depth - Crated	(3) 71"


\*Note - Pans not included

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


### Model Views

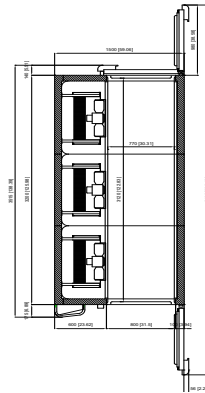

### PLAN VIEW

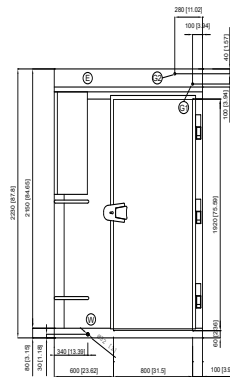

### ELEVATION VIEW

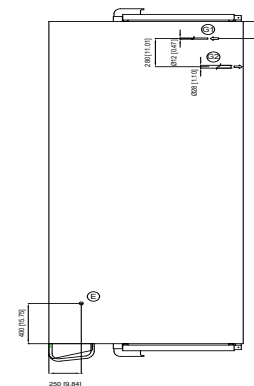

### SIDE VIEW

