



BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

PHI1 P SERIES WARMING CABINET

P SERIES TOP MOUNT WARMING CABINET

PHI1-1S-PT Solid Door Warming Cabinet

**MODEL:
PHI1XT-1S**



7 Year Parts/Labor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front, back, side and top grille (galvanized top, bottom)
- Interior is made of corrosion resistant aluminum
- Stainless steel interior door liner
- Stainless steel breaker caps
- Full electronic control
- 22 Gauge stainless steel door
- Adjustable electronic temp control from 80°F to 180°F
- Built-in, adjustable humidity control vent
- Safety shield strip type heating elements
- External mounted blower maintains even temperatures
- Accepts Cart: 26 1/2" (W) x 28" (D) x 71 1/2" (H) (cart not included)
- Heavy-duty cylinder lock
- Self-closing door with 120° hold open feature, with cam-lift hinges
- One-piece, snap-in magnetic door gasket with wiper gasket
- Hinged front shroud
- Proximity door switch activates interior incandescent lighting
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- Left or right door hinge (at time of order)
- Stainless steel interior

ELECTRICAL SYSTEM

- 15 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- Externally mounted blower system maintains even temperature through out the food zone area



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®


MODEL	PHI1XT-1S
EXTERNAL DIMENSIONAL DATA	
Width Overall	36 1/2"
Depth Overall with Handle	36 1/8"
Height Overall	89 7/8"
Number of Doors	1
Depth with Door Open 90°	65 3/4"
Door Opening (in)	27 7/8" x 72 1/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	33.6
Internal Width Overall (in)	31 1/4"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	73 1/8"
ELECTRICAL DATA	
Amps	5.9 / 6.8
Cabinet Voltage	208-240/60/1
Heater Watts per Section (@240V)	1500
Nema Plug (8' cord)	6-20P
SHIPPING DATA	
Gross Weight - Crated	345 lbs
Height - Crated	96"
Width - Crated	45"
Depth - Crated	45"

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


Top Mount Warming Cabinet Roll-In Model: PHI1XT-1S

Model Views


Required Clearance: Top 12"



PLAN VIEW

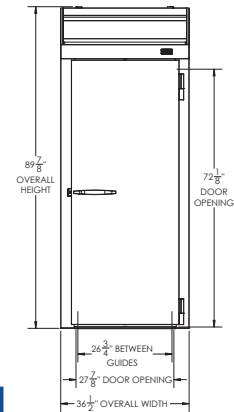

ELEVATION VIEW

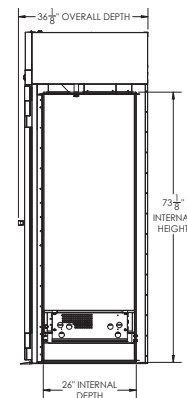

SIDE VIEW



ELECTRICAL CONNECTION



208-240/60/1
NEMA 6-20P

Unit pre-wired at factory
and include 8' long cord
and plug set.